



連續無段全合成自動變速箱油 CASOKU CVT FLUID

CASOKU CVT FLUID 是高性能、高度剪切穩定。使用精煉特級合成基礎油，特別設計廣泛適用工作溫度範圍的多用途無段變速自動變速箱油。本產品技術配方通過多項車廠及變速箱規格測試，廣泛使用於各式車種的產品。

性能 Performance

- (1) 各種汽油及柴油引擎之無段變速箱（要求下表規格需求）。
- (2) 具極佳的抗磨損能力，能有效保護機件。
- (3) 適用於 GM, Toyota, Nissan, Mitsubishi, Ford 等多種美系、日系、歐系車種（參考車主手冊）。

Suitable for Use List


製造商品牌	規 格
Audi/VW	TL 52180, G 052 180, G052 516
BMW	8322 0 136 376 / 8322 0 429 154 (EZL 799A)
Chrysler Jeep	NS-2
Dodge / Jeep	NS-2, CVTF+4, MOPAR CVT +4
Daihatsu	Ammix CVTF-DC, Daihatsu Amix CVTF-DFE
Ford	CVT30/WSS-M2C933-A/Motorcraft XT-7-QCFT, MERCON C, CVT23, M2C9328-A
GM/Saturn	DEX-CVT, GM CVT, HP CVT
Honda	HMMF, HCF ,HCF-2
Hyundai / Kia	IVTF-SP CVT 1
Mazda	CVTF 3320
Mercedes Benz	CVT28, MB-Approval 236.20
Mitsubishi DiaQueen	CVTF-J1, CVTF-J4
Mini Cooper	EZL 799A / ZF CVT V1



連續無段全合成自動變速箱油

CASOKU CVT FLUID

Nissan	Nissan NS-1/ NS-2/NS-3
Punch	CVT (EZL 779A)
Shell	Green 1V
Subaru	Lineartronic CVTF, high torque CVTF, K0425Y0710, e-CVTF, i-CVT FGp, CV30
Suzuki	CVTF 3320, TC, NS-2, CVTF Green 1, CVTF Green 2
Toyota	TC, CVT-FE, WS (Prius eCVT only)

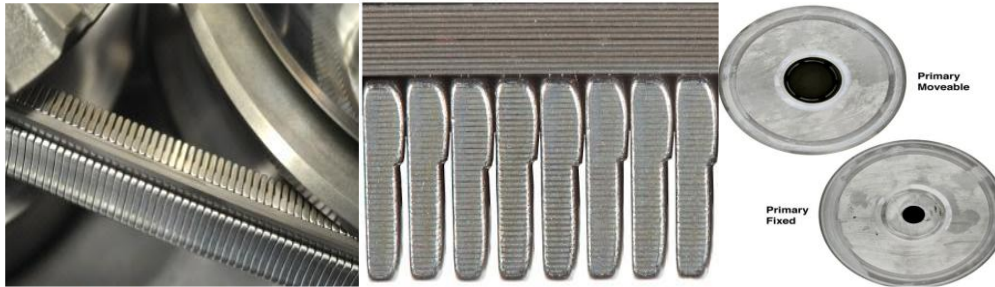

Summary of Key Benefits

- Excellent driving comfort.

Superior Anti-shudder Durability

- Reduce slippage between the belt and pulley.
- Improved safety factor=> Longer life of transmission and extended service interval.

A well-balanced, high level of both torque capacity and anti-shudder performance results.

- BTT Specified Belt Box test => Excellent wear control and durability between belt and pulley.
- Vehicle durability test => Validated performance.

Assurance through BTT Belt Box Tests and Vehicle Tests



連續無段全合成自動變速箱油 CASOKU CVT FLUID

規格性狀表現

TEST ITEMS	UNIT	METHOD	RESULT
Specific Gravity @ 15.6°C		ASTM D4052	0.830~0.860
Viscosity @ 40 °C	cSt	ASTM D445	27.00~36.00
Viscosity @ 100 °C	cSt	ASTM D445	7.000~7.500
Viscosity Index		ASTM D2270	min. 180
Flash Point	°C	ASTM D92	min. 190
Pour Point	°C	ASTM D97	max. -39

物質安全訊息

請詳閱本產品之安全資料(SDS)。請置放在幼兒無法取得之場所，並避免儲放於曝曬，雨淋等開放區域，儲藏於室內請注意通風。